

# **moviroll**

## **BATTERY ROLL PUSHERS**



### **MORE PRODUCTIVITY, HIGHER SAFETY LEVEL**

Moviroll roll pushers improve the productivity and increase the safety level as they allow the operator to effortlessly and safely maneuver both large and small cylindrical loads. Moviroll reduces risks for the operator according to the Technical Standards ISO 11228 "Ergonomics Manual handling".

They are ideal to move paper and tissue rolls, but they are also used to move loads in several other industrial applications.

Battery roll pushers offer the advantage of free movement without the constraints of the pneumatic connections or electrical cables. They are powered by high performance and plug&play 24 V or 48 V lithium battery.

### **VARIABLE SPEED**

to suit any operator needs

### **CHARGE STATUS INDICATOR**

easily see when the battery needs to be recharged

### **OVERSIZED WHEELS**

to easily overcome any obstacles along the way

### **CUT FRAMES**

for an easy removal of the roller and roller bearings

### **PLUG&PLAY BATTERY**


the plug&play eco-friendly lithium battery allows one-handed changes in less than 10 seconds

### **2 YEAR WARRANTY**

the only product in its category with a 2-year warranty on both the motor and the battery

# MRE LPT

MRE LPT is equipped with an OVERSIZED ROLLER especially designed to handle soft material rolls and to prevent roll damages.

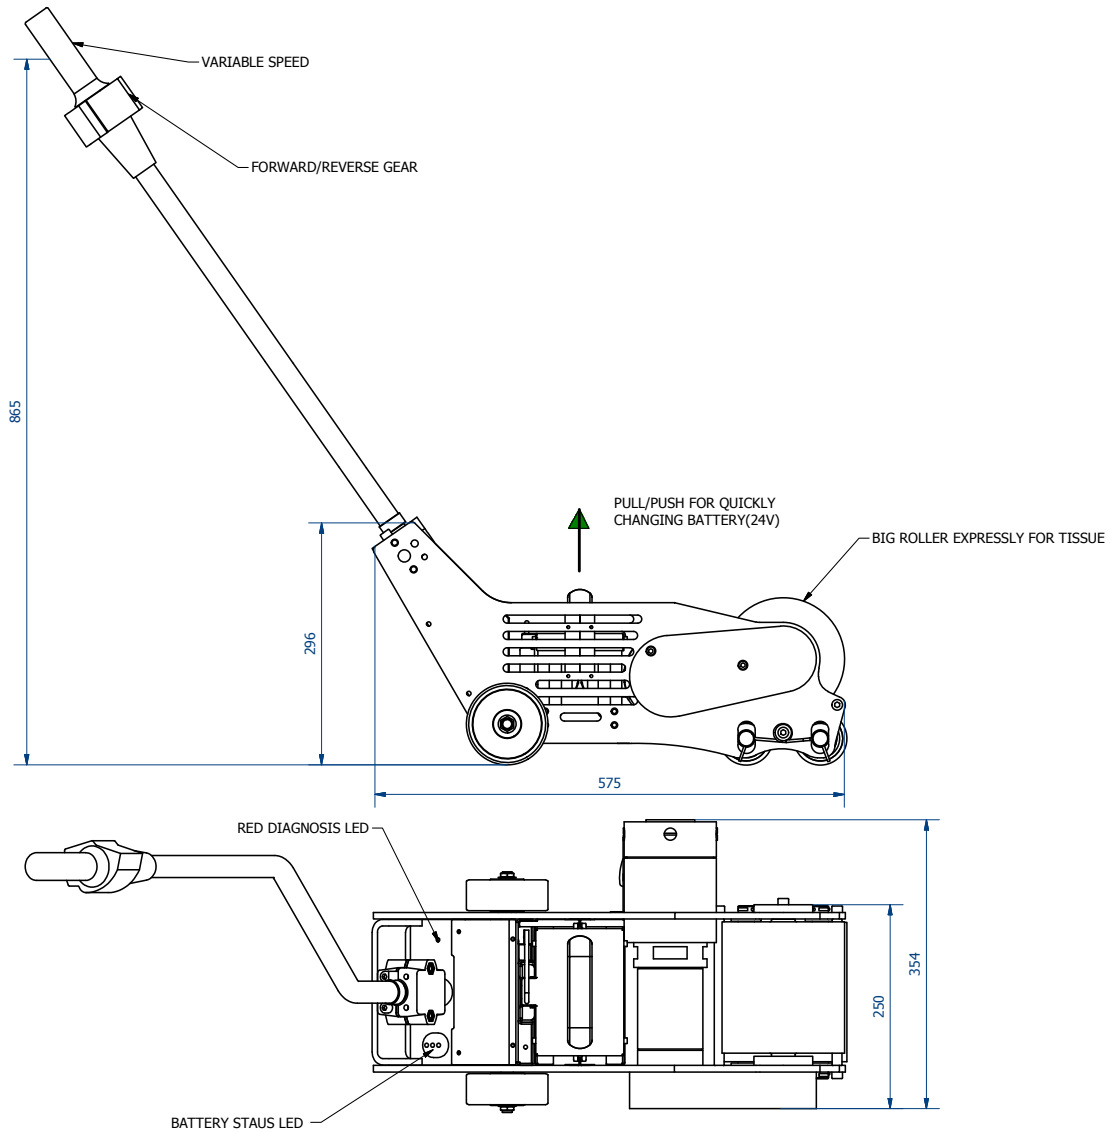

model	thrust force	lift force	max rolls diameter	motor	battery	max speed	unit weight
MRE 100 LPT	12000 kg	3000 kg	4500 mm	24 V DC IP 44	lithium 24 V	13 m/min	36 kg
MRE 200 LPT	16000 kg	4000 kg	4500 mm	24 V DC IP 44	lithium 24 V	9,3 m/min	36 kg
MRE 300 LPT	20000 kg	5000 kg	4500 mm	24 V DC IP 44	lithium 24 V	7,5 m/min	36 kg

**renova srl**  
 registered office : via palmanova 24, 20132 milano - italy  
 operational hq: viale rimembranze 93, 20099 sesto s. g., milano - italy  
 VAT IT03758670965 | REA MI-1699970 | share capital. €10.000,00

**www.renova-srl.com**  
 support@renova-srl.com  
 info@renova-srl.com  
 t. +39 02 27007394

