

moviroll

ANCILLARY EQUIPMENT



WITH SAFETY STOP WEDGE CYLINDRICAL LOADS ARE PREVENTED FROM ROLLING AWAY

Moviroll ancillary equipment integrates the functionality of the pneumatic and battery powered roll pushers, as they support the operator in all operations related to the handling of loads: their rotation, change in direction, and their safe stop.

In addition to being moved, rolls might need to be safely stored or momentarily put aside, that is when Renova's Safety Stop Wedge comes into the picture.

It is used in combination with Moviroll roll pushers and other ancillary equipment: the cylindrical load is moved to the desired position and then prevented to roll away.

EASY TO CARRY

it can be placed wherever needed in the plant, with just one hand

COMPACT DESIGN

small but sturdy

REINFORCED CHASSIS


for the easy handling of heavy reels

SAFETY PRECAUTION

no more loads rolling uncontrollably from their intended stop

SAFETY STOP WEDGE

The load can't roll away, preventing possible crushings and injuries.

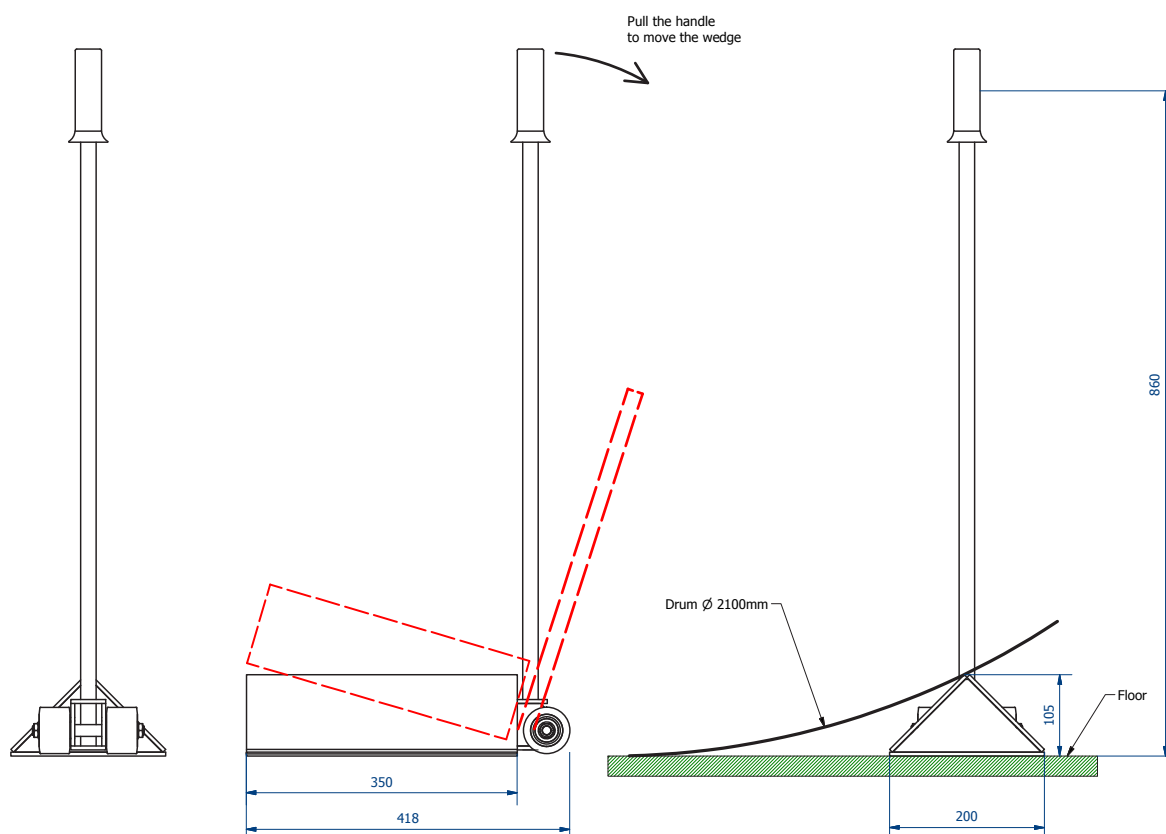

model	load capacity	rotation	unit weight	unit dimensions
WSS8000	8000 kg	360°	9 kg	418 x 200 x 860 mm